

# Dual Bay eSATA/USB2.0 Hardware RAID



## Quick Installation Guide

### To turn on the power

make sure the main switch power on the back panel is ON, then press the power switch on the front panel.

### To turn off the power

press and hold the power switch for more than 3 seconds.

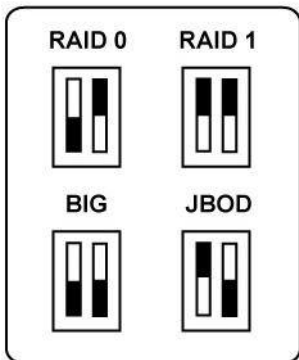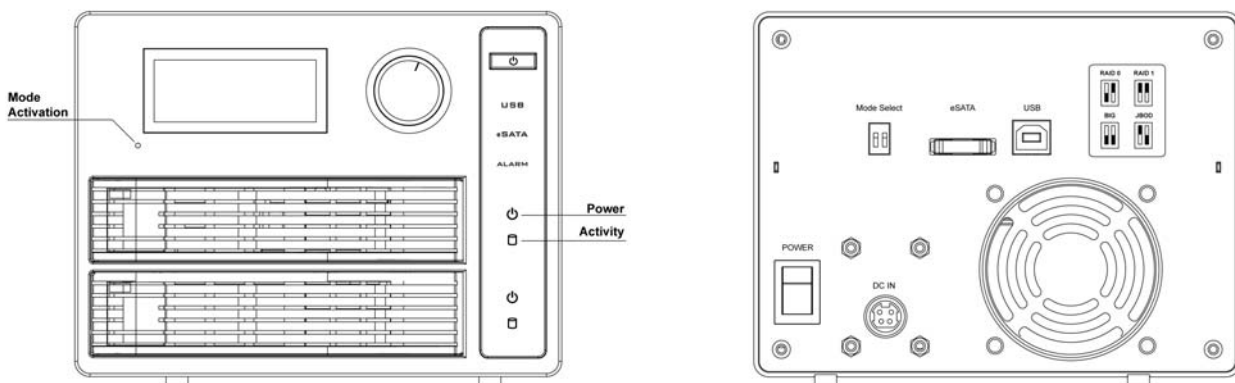

### RAID 0

Doubling the capacity whichever drive is smaller (for faster speed)

### RAID 1

Mirroring, mirror the capacity of the drive whichever is smaller (for data security)

### JBOD

Just a Bunch Of Disks (independent disk access)

### BIG

Adding the two drives capacity together (for drive capacity)

### **Two steps to change the drive mode**

Step 1.) Select the designated drive mode and adjust the DIP switch accordingly


Step 2.) Use a pin to poke the "Mode Activation" switch in the front panel





**WARNING!**

**Any mode change will delete all data on the drive. Please handle it with care.**


**LCD display and the selector**

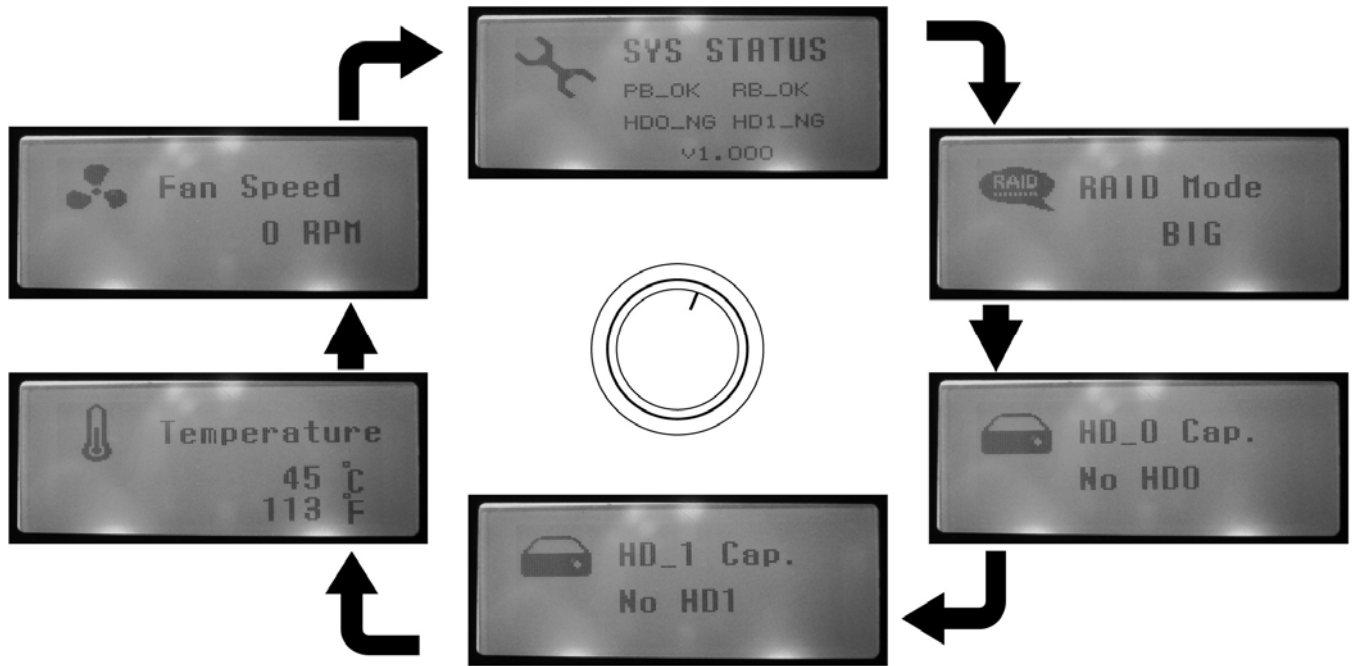


**To access the drive**

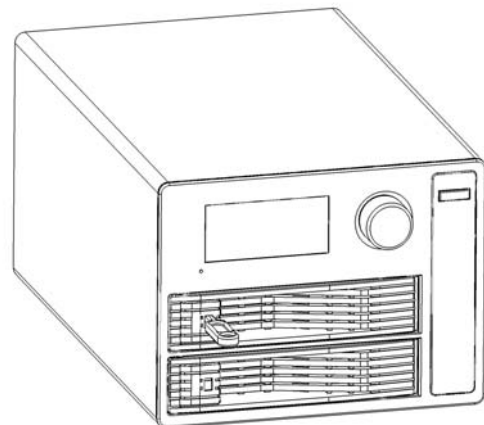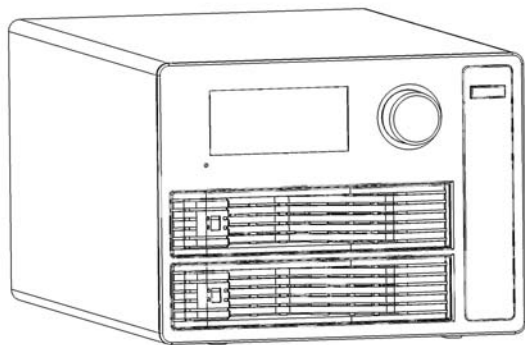

1. Use the plastic tool comes with the system to lock or unlock the drive bay handle (when the red mark shows, the door is locked)

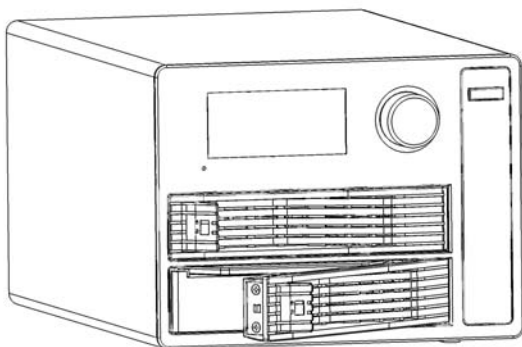

2. Pull the drive bay handle to open the drive bay

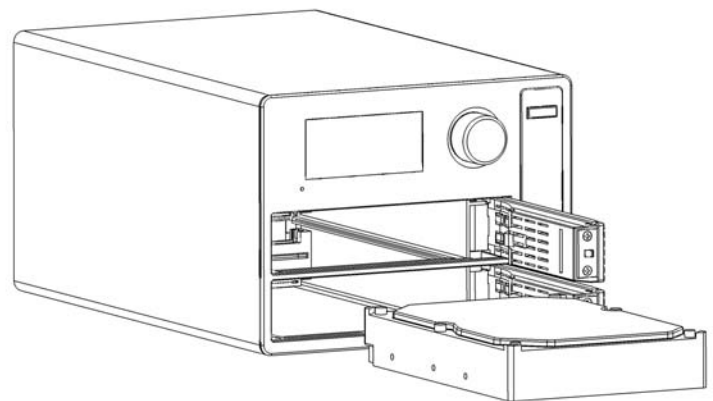

3. Insert or remove the disk drive unit